



2310 E. Orangethorpe Ave, Anaheim, CA 92806


714-738-6194 / 714-446-0119 FAX

www.accrmfg.com

**Series 1735-X Extractor Lever Product Specification**

**Part Number Code:**

	<b>1735-X</b>	<b>PP</b>	<b>BA</b>	<b>SS</b>	
<b>Injector / Ejector Series and Card Size</b>					<b>SilkScreen Option:</b>
<b>X = Card thickness in 32nds</b>					SS = SilkScreen Required ( per customer request/artwork)
1 = 1/32" Card Thickness (.031" REF)					Leave Blank = None Required
2 = 2/32" Card Thickness (.062" REF)					
3 = 3/32" Card Thickness (.093" REF)					<b>Finish Option:</b>
4 = 4/32" Card Thickness (.125" REF)					BA = Black Anodize per Mil-A-8625, Type II, Class 2
					BH = Black Hard Anodize per Mil-A-8625, Type III, Class 2
					CC = Chem-Film Clear per MIL-C-5541, CL 3 (ROHS)
					CG = Chem-Film Gold per MIL-C-5541, CL 1A
					RA = Red Anodize per Mil-A-8625, Type II, Class 2
					Other colors available on request.
<b>Hardware Option:</b>					
PP = Pre-Started Assembly Pin					
Blank = One Pin (Stainless 3/32" dia X 5/16" long) per Lever					

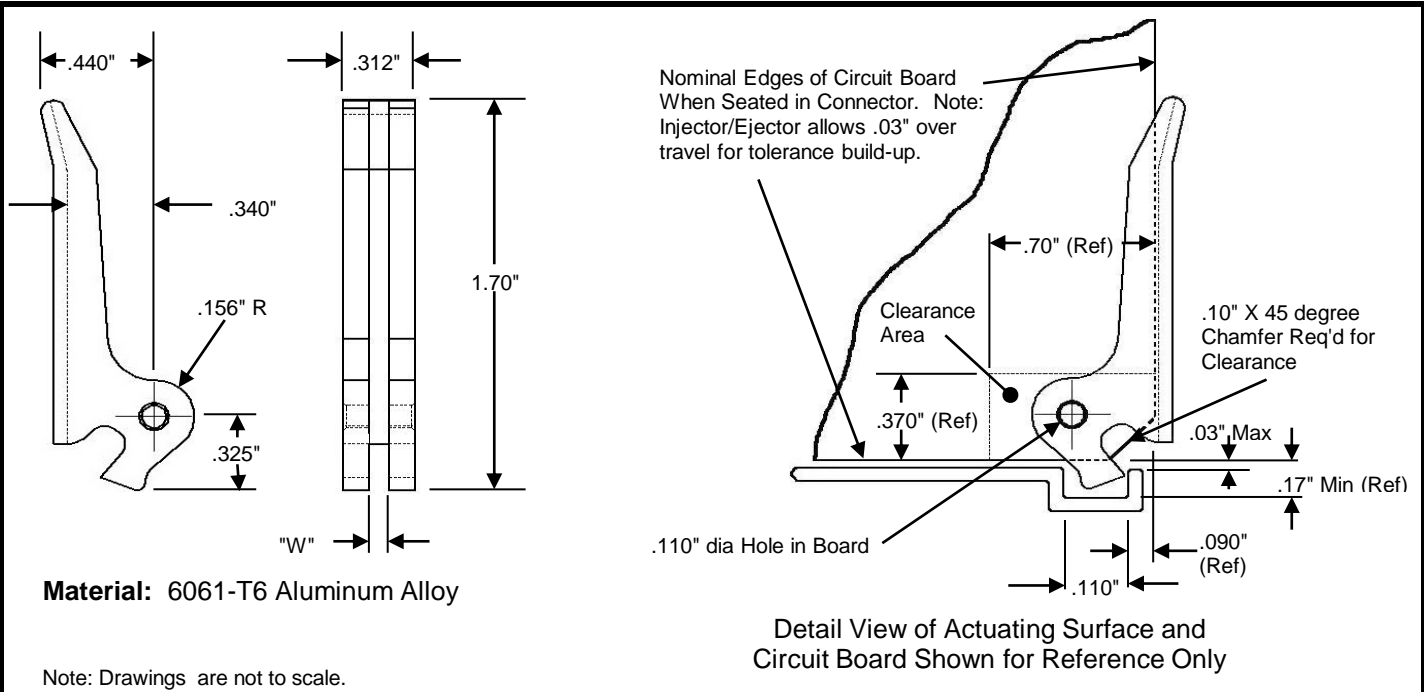

BOARD THICKNESS CHART:		
Part #	Board Thickness	"W" Dim
1735-1	1/32 - .031	.048"
1735-2	2/32 - .062	.080"
1735-3	3/32 - .093	.110"
1735-4	4/32 - .125	.140"

\*\*ACCR Products are 100% Made in the USA.

**FEATURES:**

- \*Strong Lever Action Design Overcomes Insertion and Ejection Forces in Excess of 100 lbs.
- \*Actuates from a Simple "U" Channel Form.
- \*Available with Conductive Finish.
- \*Available in Colors for Coding.
- \*Generous Area for Identification Marking.
- \*Angled Lever to Assist/Ease Gripping When Lifting.

**APPLICATION DATA:**

Two Inserter-Extractors are Recommended per Board. Provides Insertion and Ejection Travel of .30" Minimum with a Mechanical Advantage of Approximately 5.5 : 1.