



0.050 (1.27) Centers | Wireless Receptacle

BECU TIPS	DIAMETER
 J	 0.020 (0.51)
 S	 0.020 (0.51)

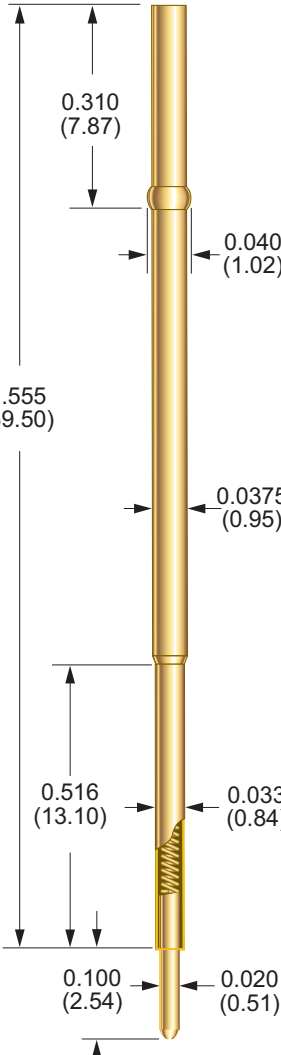

0.310
(7.87)

0.040
(1.02)

1.555
(39.50)

0.0375
(0.95)

0.516
(13.10)

0.033
(0.84)

0.100
(2.54)

0.020
(0.51)

Minimum Centers	0.050 (1.27)
Drill Size	#61
Mounting Hole Size	0.0385/0.0390 (0.98/0.99)
Spring Force	2.70 oz (77 g) @ 0.069 (1.75) travel
Maximum Travel	0.100 (2.54)
Working Travel	0.070 (1.77)

Receptacle	Beryllium copper, gold plated
Spring	Music wire, gold plated
Plunger	Beryllium copper, gold plated over nickel

Insertion Tool	RT-50
----------------	-------


R - 50C - J - DE


55

► R-075-J-DE SERIES

0.075 (1.91) Centers | Wireless Receptacle

For ICT-075/S-075 Series Probes see pg. 15
For ICT-075 Lead Free Series Probes see pg. 16
For ICT-L075 Series Probes see pg.18

BECU TIPS	DIAMETER
 J 60°	0.020 (0.51) 
 S	0.020 (0.51) 

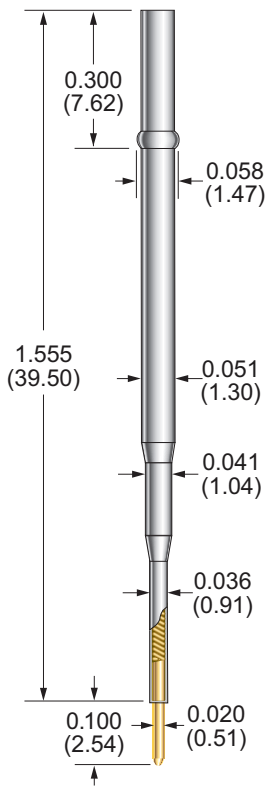

PROBE SPECIFICATIONS

Minimum Centers	0.075 (1.91)
Drill Size	1.45 mm
Mounting Hole	0.055/0.057 (1.40/1.45)
Spring Force	2.70 oz (77 g) @ 0.070 (1.77) travel
Maximum Travel	0.100 (2.54)
Working Travel	0.070 (1.77)

MATERIALS

Receptacle	Nickel/silver, gold lined inside
Spring	Music wire, gold plated
Plunger	Beryllium copper, gold plated over nickel

TOOLS

Insertion Tool	RT-1
----------------	------


HOW TO ORDER

R - 075 - J - DE	
1 ► SERIES	R
2 ► SIZE	075
3 ► TIP STYLE	J, S
4 ► TERMINATION	DE DOUBLE-ENDED

► **R-100-J-DE SERIES**

0.100 (2.54) Centers | Wireless Receptacle

For ICT-100/S-100 Series Probes see pg. 21
For ICT-100 Lead Free Series Probes see pg. 22
For ICT-L100 Series Probes see pg. 24

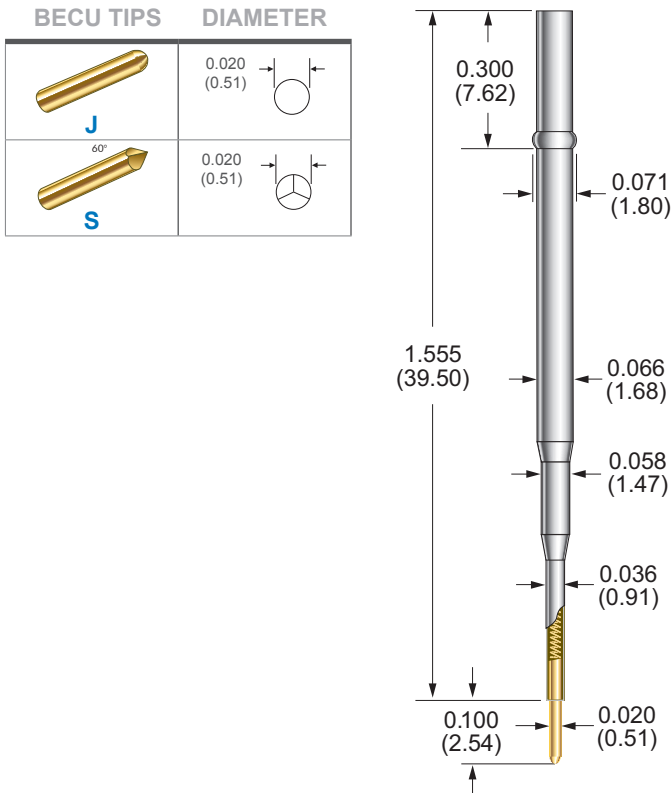

PROBE SPECIFICATIONS

Minimum Centers	0.100 (2.54)
Drill Size	#50
Mounting Hole	0.068/0.070 (1.73/1.78)
Spring Force	2.70 oz (77 g) @ 0.070 (1.77) travel
Maximum Travel	0.100 (2.54)
Working Travel	0.070 (1.77)

MATERIALS

Receptacle	Nickel/silver, gold lined inside
Spring	Music wire, gold plated
Plunger	Beryllium copper, gold plated over nickel

TOOLS

Insertion Tool	RT-100
----------------	--------

HOW TO ORDER

R - 100 - J - DE	
1 2 3 4	
1 ► SERIES	R
2 ► SIZE	100
3 ► TIP STYLE	J, S
4 ► TERMINATION	DE DOUBLE-ENDED