



2310 E. Orangethorpe Ave, Anaheim, CA 92806

714-738-6194 / 714-446-0119 FAX


www.accrmf.com

Series 1755-X Extractor Lever Product Specification

Part Number Code:


	1755-X	PP	BA	SS	
Injector / Ejector Series and Card Size			SilkScreen Option:		
X = Card thickness in 32nds			SS = SilkScreen Required (per customer request/artwork)		
1 = 1/32" Card Thickness (.031" REF)			Leave Blank = None Required		
2 = 2/32" Card Thickness (.062" REF)					
3 = 3/32" Card Thickness (.093" REF)					
4 = 4/32" Card Thickness (.125" REF)					
Hardware Option:			Finish Option:		
PP = Pre-Started Assembly Pin			BA = Black Anodize per Mil-A-8625, Type II, Class 2		
Blank = One Loose Pin (Stainless 3/32" X 1/4") per Lever			BH = Black Hard Anodize per Mil-A-8625, Type III, Class 2		
			CC = Chem-Film Clear per MIL-C-5541, CL 3 (ROHS)		
			CG = Chem-Film Gold per MIL-C-5541, CL 1A		
			RA = Red Anodize per Mil-A-8625, Type II, Class 2		
			Other colors available on request.		

Note: Drawings are not to scale.

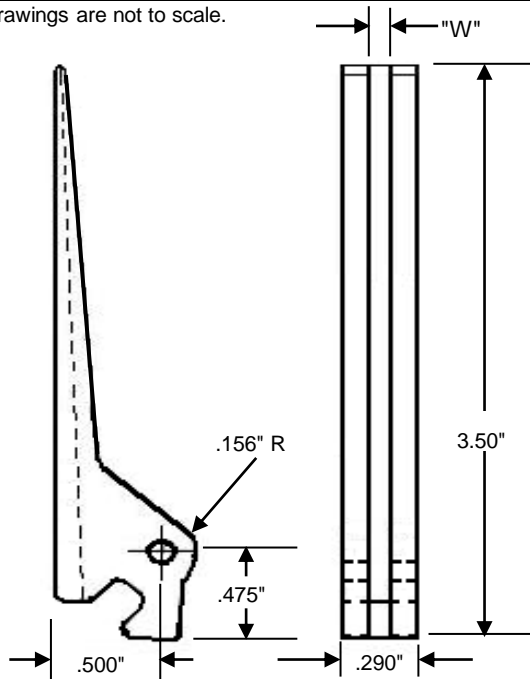

Material:
 Lever - 6061-T6 Aluminum Alloy
 Roll Pin - .094 x .250 Stainless Steel

Nominal Edges of Circuit Board
 When Seated in Connector.
 Note: Injector/Ejector Allows .03"
 Over Travel for Tolerance Allowance.

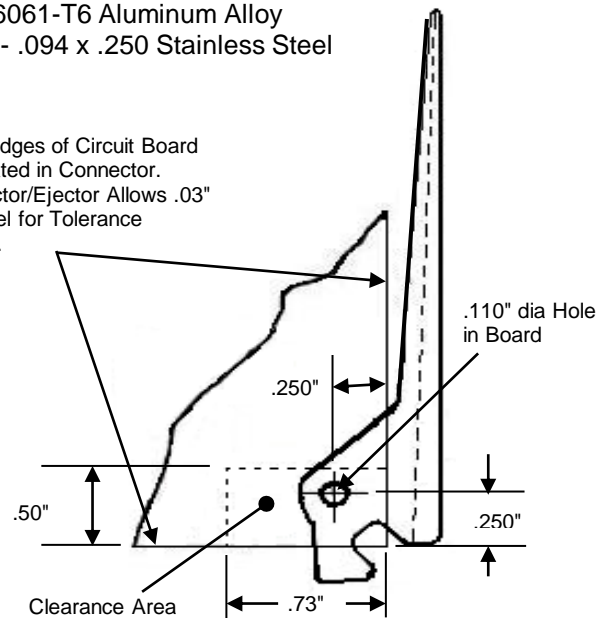

BOARD THICKNESS CHART:

Part #	Board Thickness	"W" Dim
1755-1	1/32 - .031	.048"
1755-2	2/32 - .062	.080"
1755-3	3/32 - .093	.110"
1755-4	4/32 - .125	.140"

**ACCR Products are 100% Made in the USA.

FEATURES:

- *High-Strength Lever Action Design Overcomes Extreme Insertion and Ejection Forces.
- *Actuates from a Simple "U" Channel Form.
- *Available with Conductive Finish.
- *Clearance Chamfer not Required on Circuit Board.
- *Narrow Profile to Minimize Interference.
- *Simplifies insertion and extraction of Circuit Boards.

APPLICATION DATA:

Two Inserter-Extractors are Recommended per Board. Provides Insertion and Ejection Travel of .35" Minimum with a Mechanical Advantage of Approximately 8 : 1.

Updated 9/5/2012