

**Series 3246 - Product Specification**



**Part Number Code:**

3246 MVW BA - X.XX H L R

**ACCR Series**





**Hardware Option:**  
 1st Position Blank = 7/64" Hex Socket Std  
 M = Metric 2.5 Hex Socket Head on screw  
 V = Visual Lock indicator (3/32 Hex Socket / add .20" to screw length)  
 W = Lock and Flat Washer (add .100" to screw length)

**Finish Option:**  
 BA = Black Anodize per Mil-A-8625, Type II, Class 2  
 BH = Black Hard Anodize per Mil-A-8625, Type III, Class 2  
 CC = Chem-Film Clear per Mil-C-5541 (ROHS)  
 CG = Chem-Film Gold per Mil-C-5541  
 EN = Electroless Nickel per Mil-C-26074  
 BL = Black Hard Anodize with Dry Film Lube per Mil-L46010  
 RA = Red Anodize per Mil-A-8625, Type II, Class 2

**Option R =** Locknut for retaining the screw  
**Option L =** Locking Element on screw threads

**Mounting Options:**  
 E = Extra mounting hole  
 H = C'bore .156" Dia. X .200" Deep X .068/.073" Dia.  
 Hole Thru, CSK 100 degree X .140" Dia.  
 T0 = 0-80 Tapped Thru Holes  
 T2 = 2-56 Tapped Thru Holes  
 TM2 = Metric 2 Tapped Thru Holes  
 TM2.5 = Metric 2.5 Tapped Thru Holes  
 P = Indexing Pins .062 x .050" (two positions only)

**Assembly Length in decimal inches:**  
 Standard lengths = 2.80, 3.80 and 4.80  
 Other lengths or specifications on request.

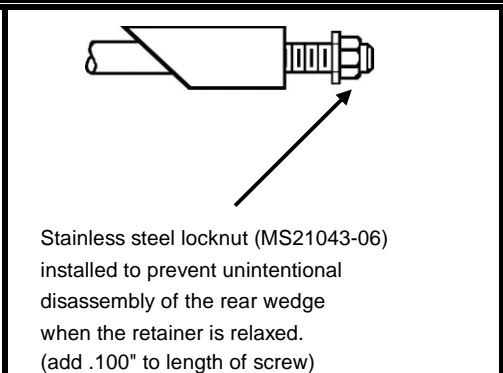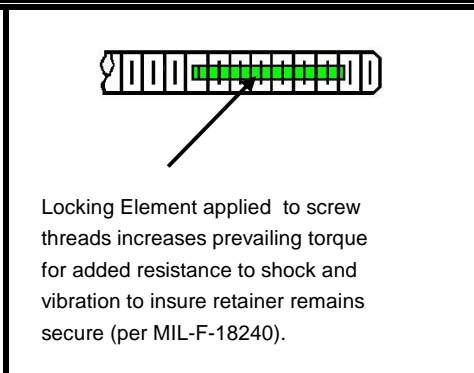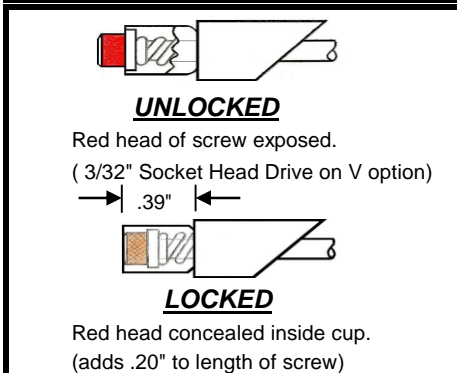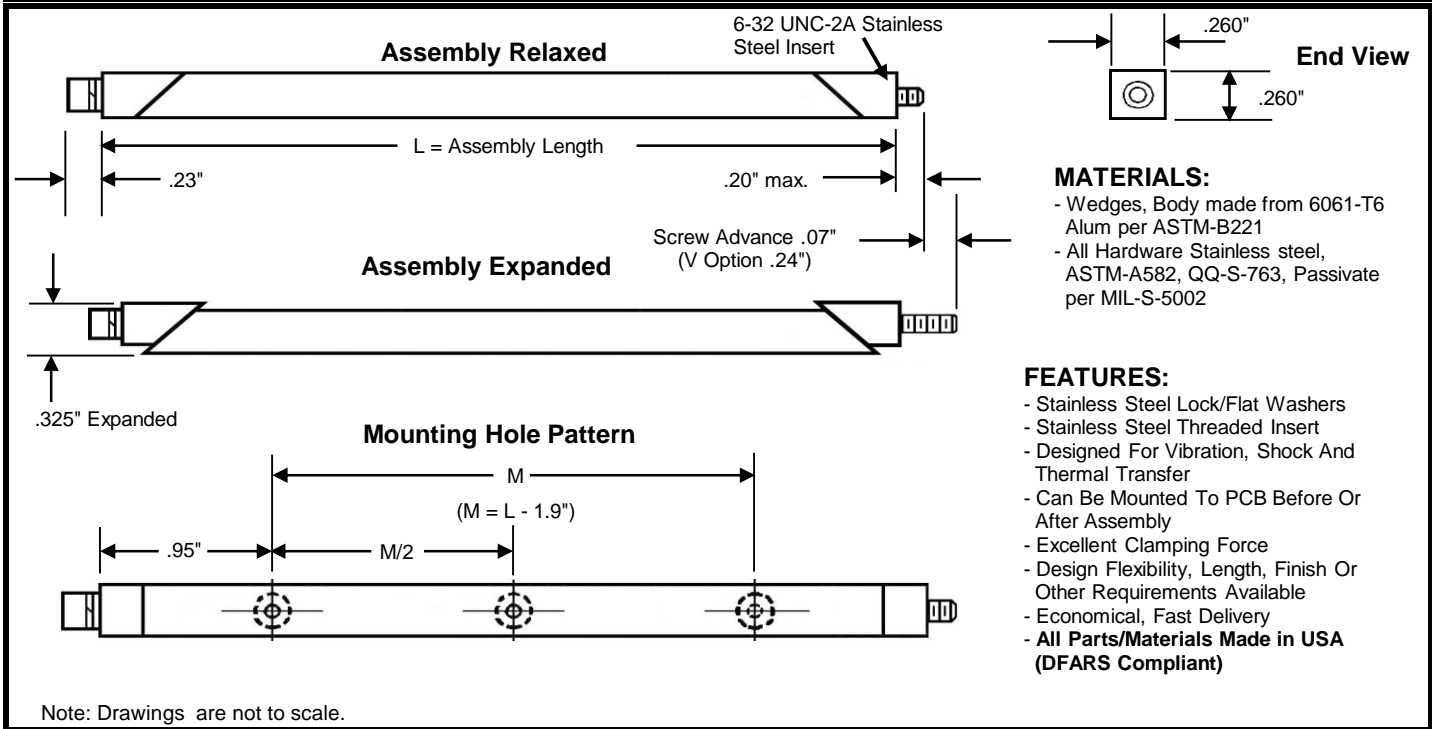

"V" Option:  
 Provides color code on the screw head as a visual indicator the retainer is locked.

"L" Option:  
 Adds Lock Patch to screw threads for additional resistance to shock and vibration.

"R" Option:  
 Add MS21043-06 Lock Nut to prevent unintentional disassembly of rear wedge.