





Series 3370 - Product Specification



Part Number Code:		3370	MVW	BA	- X.XX	H	L	R	
ACCR Series									
Hardware Option:									
1st Position Blank = 9/64" Hex Socket Std									
M = Metric 3mm Hex Socket Head on Screw (9/64" Hex Socket Std)									
V = Visual Lock indicator (add .20" to screw length)									
W = Lock and Flat Washer (add .100" to screw length)									
Finish Option:									
BA = Black Anodize per Mil-A-8625, Type II, Class 2									
BH = Black Hard Anodize per Mil-A-8625, Type III, Class 2									
CC = Chem-Film Clear per Mil-C-5541 (ROHS)									
CG = Chem-Film Gold per Mil-C-5541									
EN = Electroless Nickel per Mil-C-26074									
BL = Black Hard Anodize with Dry Film Lube per Mil-L46010									
RA = Red Anodize per Mil-A-8625, Type II, Class 2									
		Option R = Locknut for retaining the screw							
		Option L = Locking Element on screw threads							
		Mounting Options:							
		E = Extra mounting hole							
		H = C'bore .156" Dia. X .200" Deep X .068/.073" Dia. Hole Thru, CSK 100 degree X .140" Dia.							
		T0 = 0-80 Tapped Thru Holes							
		T2 = 2-56 Tapped Thru Holes							
		TM2 = Metric 2 Tapped Thru Holes							
		TM2.5 = Metric 2.5 Tapped Thru Holes							
		P = Indexing Pins .062 x .050" (two positions only)							
		Assembly Length in decimal inches:							
		Standard lengths = 2.80, 3.80 and 4.80							
		Other lengths or specifications on request.							

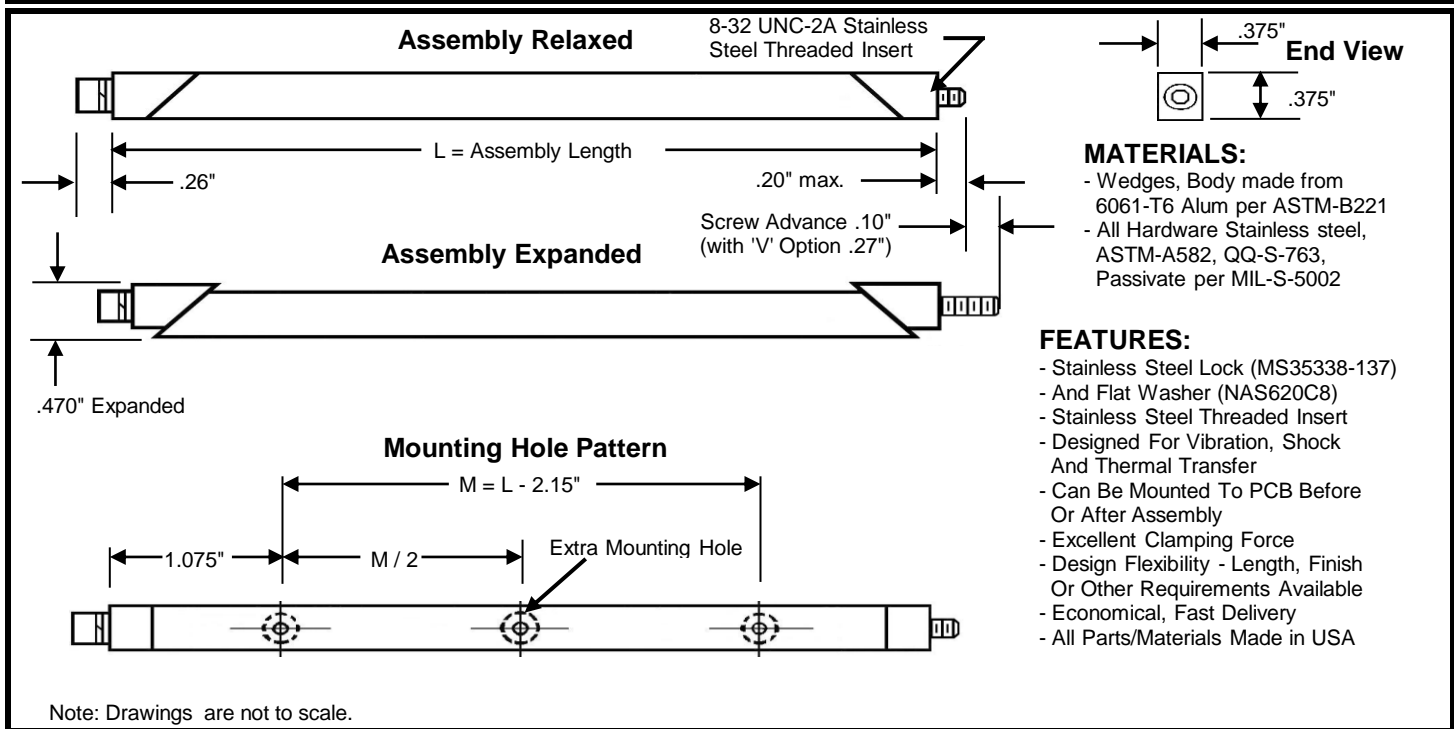

Note: Drawings are not to scale.

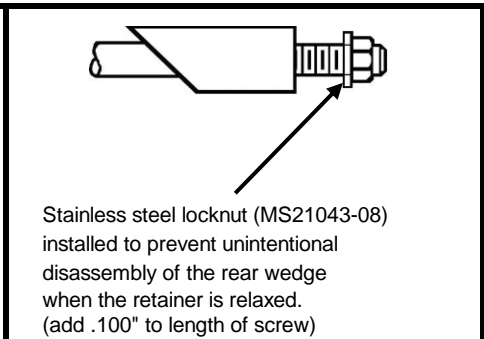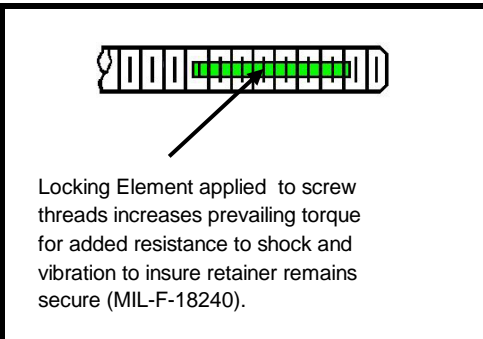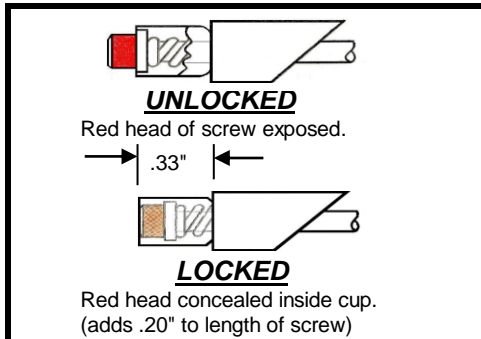

"V" Option:
Provides color code on the screw head as a visual indicator the retainer is locked.

"L" Option:
Adds Lock Patch to screw threads for additional resistance to shock and vibration.

"R" Option:
Add MS21043 Lock Nut to prevent unintentional disassembly of rear wedge.