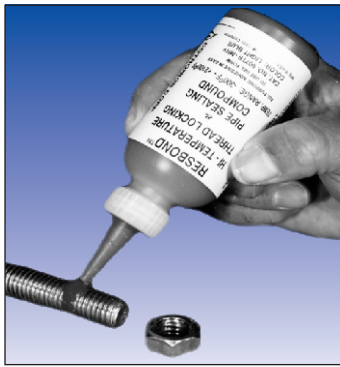


**RESBOND™ 907TS THREADLOCKERS****Viscosities and Strengths To Meet Your Toughest Sealant Needs****Use from -300°F to +2100°F**

- **Easy to Use** No measuring. No mess. Will not run or drip while applying.
- **Economical** Just one bottle provides up to 2000 applications.
- **Room Temperature Cures** Saves time and money. No costly heat treatments.
- **High Temperature Stability** Will not soften or decompose at elevated temperatures.
- **High Bond Strength** Excellent Adhesion. Seals most metals and ceramic parts.
- **Electrical Resistance** Penetrates fine openings to provide electrical resistance.
- **Corrosion Resistance** Can be used with all conventional chemicals and solvents.

It's easy. No mixing required.

Just apply and let dry.

Resbond™ 907TS cures at room temperature.

Forms thermally stable, electrically insulating, chemically resistant bonds.

Packaged in convenient 4 oz. applicator bottles.

Will not run off or drip while applying.

Ideal for use on set screws, fasteners, bolts, pipes threads.

Removable with hand tools (under most conditions).



| <b>Resbond™<br/>907TS<br/>2100°F</b>    | <b>Use<br/>For</b>                 | <b>Viscosity<br/>(cps)</b> | <b>Shear<br/>Strength<br/>(psi)</b> | <b>Breaking<br/>Torque<br/>(inch-lbs.)</b> | <b>Gap<br/>Fill<br/>(in.)</b> | <b>Applications<br/>Include</b>   |
|---|------------------------------------|----------------------------|-------------------------------------|--|-------------------------------|---|
| <b>Green</b><br>Low<br>Viscosity        | Penetrates<br>Fine<br>Openings     | 2,000                      | 370                                 | 242  | 0.003                         | Small, Set, Adjustment Screws,<br>Fasteners and Instrumentation               |
| <b>Blue</b><br>Standard                 | General<br>Purpose                 | 4,000                      | 400                                 | 270  | 0.005                         | Medium Screws, Nuts, Bolts,<br>Pipe Threads, Fittings, etc.                   |
| <b>Red</b><br>High<br>Strength          | Prevents<br>Vibration<br>Loosening | 3,000                      | 450                                 | 276  | 0.010                         | Large Fasteners and Set Screws.<br>Pipe Threads, Studs, Bearings, etc.        |
| <b>Gold</b><br>High<br>Viscosity        | Fills Large<br>Gaps and<br>Grooves | 12,000                     | 500                                 | 217  | 0.030                         | For difficult applications, Flanges,<br>Bolts, Pipe Threads, Large Nuts, etc. |
| <b>507TS<br/>500°F<br/>Epoxy Teflon</b> | General<br>Purpose                 | 12,000                     | 12,000                              | 500  | 0.010                         | All purpose 2 component Epoxy<br>Teflon for difficult applications            |

**Cat. No.****Description**

907TS-1..... 4 oz. Applicator Bottles (Specify Green, Blue, Red)

907TS-1GLD..... 4 oz. Applicator Bottle (Gold)

907TS-CP..... Case Pack - Twelve - 4 oz. Applicator Bottles

907TS-TK..... Trial Evaluation Kit - Four - 1 oz. Bottles (Green, Blue, Red, Gold)

507TS-1..... Dispenser Kit