



2310 E. Orangethorpe Ave, Anaheim, CA 92806

714-738-6194 / 714-446-0119 FAX

www.accrmfg.com

**Series 1773-X Extractor Lever Product Specification**

**Part Number Code:**


**Injector / Ejector Series and Card Size**      **1773-X**      **PP**      **BA**

- X = Card thickness in 32nds**  
 1 = 1/32" Card Thickness (.031" REF)  
 2 = 2/32" Card Thickness (.062" REF)  
 3 = 3/32" Card Thickness (.093" REF)  
 4 = 4/32" Card Thickness (.125" REF)

**Hardware Option:**  
 PP = One Assembly Pin Pre-Started, One Pin Shipped Loose  
 Blank = Two Pins (Stainless 3/32" X 1/4") Shipped Loose per Lever

**Finish Option:**  
 BA = Black Anodize per Mil-A-8625, Type II, Class 2  
 BH = Black Hard Anodize per Mil-A-8625, Type III, Class 2  
 CC = Chem-Film Clear per MIL-C-5541, CL 3 (ROHS)  
 CG = Chem-Film Gold per MIL-C-5541, CL 1A  
 RA = Red Anodize per Mil-A-8625, Type II, Class 2

Note: Pins and Latch Spring are Stainless Steel and Passivated. Lever and Latch are Made From 6061-T6 Aluminum

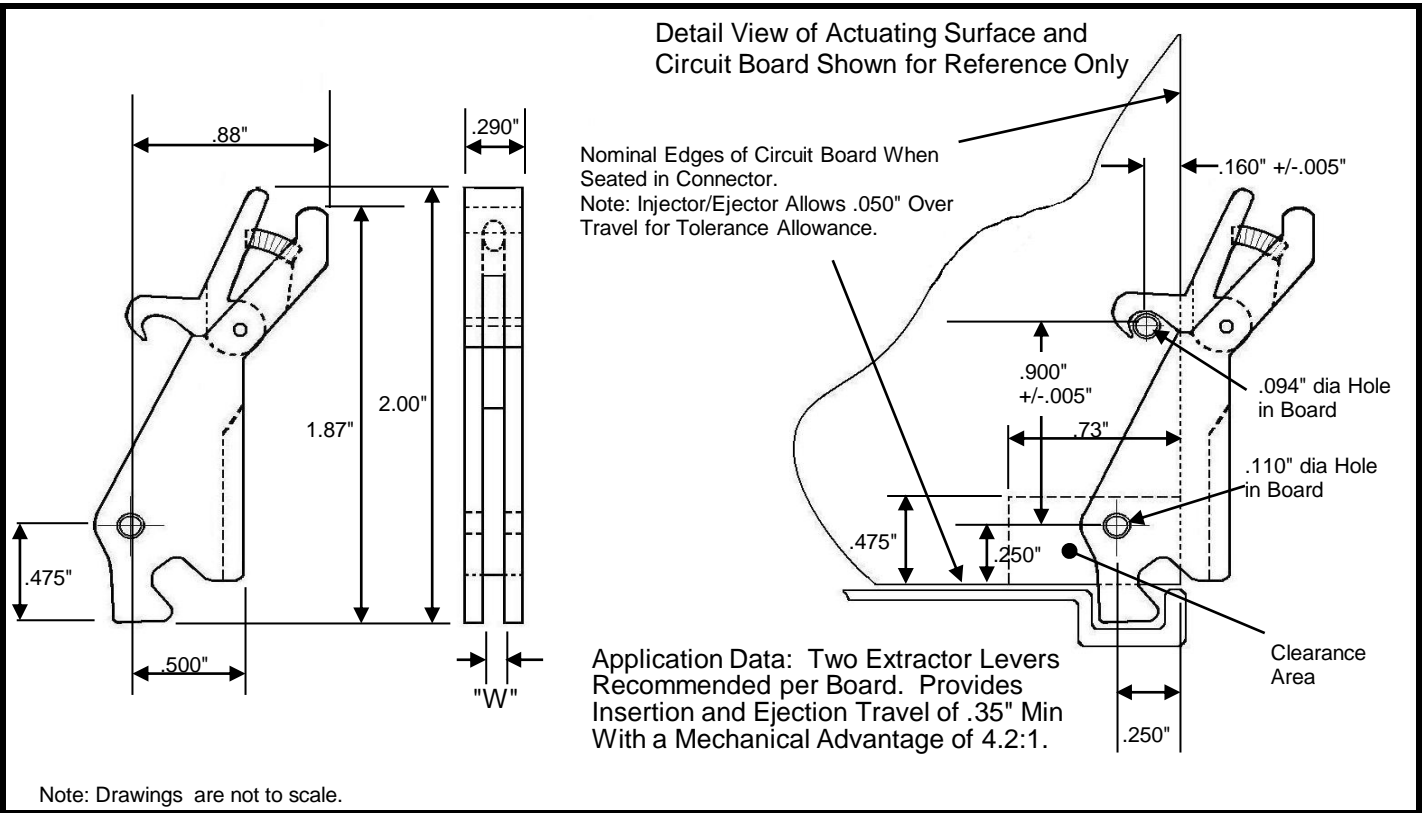

**BOARD THICKNESS CHART:**

Part #	Board Thickness	"W" Dim
1773-1	1/32 - .031	.048"
1773-2	2/32 - .062	.080"
1773-3	3/32 - .093	.110"
1773-4	4/32 - .125	.140"

\*\*ACCR Products are 100% Made in the USA.

**FEATURES:**

- \*High-Strength Lever Action Design Overcomes Extreme Insertion and Ejection Forces.
- \*Actuates from a Simple "U" Channel Form.
- \*Available with Conductive Finish.
- \*Clearance Chamfer not Required on Circuit Board.
- \*Narrow Profile to Minimize Interference.
- \*Positive Locking Prevents PCB from Backing Out.

Updated 9/5/2012